

### TREVIRA

Composition : 100% POLYESTER TREVIRA CS  
Weight : 340 g/m<sup>2</sup>  
Light fastness : Scale 6 (blue scale) Xenotest  
Abrasion resistance : 100.000 (rubs) Martindale  
Cleaning Washing :



Fire resistance:

|    |       |            |    |                    |    |             |                |
|----|-------|------------|----|--------------------|----|-------------|----------------|
| C1 | CRIBS | BS 7176 MH | M1 | NF D 60013 (AM 18) | B1 | EN 1021/1-2 | IMO A 652 (16) |
|----|-------|------------|----|--------------------|----|-------------|----------------|




### FLEX

Composition : 100% POLYESTER TREVIRA CS  
Weight : 300 g/m<sup>2</sup>  
Light fastness : Scale 6 (blue scale) Xenotest  
Abrasion resistance : 100.000 (rubs) Martindale  
Cleaning Washing :



Fire resistance:

|    |       |            |    |                    |    |             |                |
|----|-------|------------|----|--------------------|----|-------------|----------------|
| C1 | CRIBS | BS 7176 MH | M1 | NF D 60013 (AM 18) | B1 | EN 1021/1-2 | IMO A 652 (16) |
|----|-------|------------|----|--------------------|----|-------------|----------------|

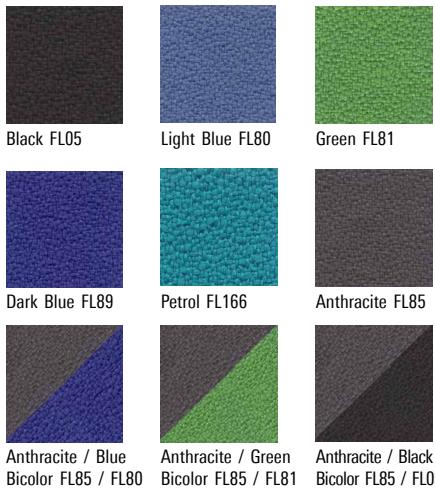

### TREVIRA BLEND

Composition : 100% POLYESTER TREVIRA CS  
Weight : 420 g/m<sup>2</sup>  
Light fastness : Scale 6 (blue scale xenotest)  
Abrasion resistance : 100.000 (rubs) Martindale  
Cleaning Washing :



Fire resistance:

|    |       |    |    |             |            |                   |                |
|----|-------|----|----|-------------|------------|-------------------|----------------|
| C1 | CRIBS | M1 | B1 | EN 1021/1-2 | BS 7176 MH | NF D 60013 (AM18) | IMO A 652 (16) |
|----|-------|----|----|-------------|------------|-------------------|----------------|



### STAMSKIN

Composition : Stamskin TOP F 4340, backing Polyamide-jersey, coating antimicrobial and anti-fungal treatment  
Weight : 780 g/m<sup>2</sup>  
Light fastness : Scale 7  
Abrasion resistance : >120.000 rubs Martindale  
Advantages : Urine-, blood-, sweat-, fungal and waterproof, manufactured to environmentally friendly standards ISO 14001  
Cleaning : With brush, water and soap, rinse of with water, do not clean with stain-removers containing solvents or oily products  
N°528/2012/CE-Folpet : Stamskin Top contains the biocidal product Folpet, an antifungal additive used to help maintaining appearance, physical properties and prolong the service life of these articles

Flame retardant:

|             |                 |               |
|-------------|-----------------|---------------|
| UK: BS 5852 | D: DIN 53438/T2 | F: NFP 92.507 |
|-------------|-----------------|---------------|



### PUxx

Composition : PUxx no. 1, 100% Polyurethane, backing polyester cotton mixture, free from Phthalate and PVC.  
Weight : ± 520 g/m<sup>2</sup>  
Abrasion resistance : > 300.000 Martindale  
Light fastness : 6-7 (8 is excellent)  
Cleaning : PUxx no. 1 is easy to clean and disinfect. It is resistant to most cleaning agents and disinfectants (based on alcohol, chlorine and ammonia). Do not use solvents.  
Advantages : PUxx nr. 1 is free of Phthalate and PVC and OEKO-TEX certified. 100% waterproof. Urine and blood resistant. Extremely scratch resistant surface. Easily transport for heat (no sweat feeling).

Flame retardant:

|                   |             |              |                      |                                              |
|-------------------|-------------|--------------|----------------------|----------------------------------------------|
| GB BS 5852 Crib 5 | EN 1021 1-2 | CALL117-2013 | IMO 2010 FTP: part 8 | D DIN 4102 B1<br>(available on request only) |
|-------------------|-------------|--------------|----------------------|----------------------------------------------|



### LEATHERETTE

Composition : Backing Cotton Jersey, coating fire retardant plasticised PVC  
Weight : 590 g/m<sup>2</sup>  
Light fastness : ISO105 >6  
Cleaning : Clean material with humid cloth and householdsoap. Do not use cleaning-materials that contain solvents.

Flame retardant :

|                                 |               |
|---------------------------------|---------------|
| FMVSS 302 (= 95/28/EG IV, R118) | b, EN1021 1+2 |
|---------------------------------|---------------|



### ESD DRALON

Composition : Dralon-Bekinox  
Weight : 560 g/m<sup>2</sup>  
Colour fastness : Scale 5-8  
Abrasion resistance : 50.000 rubs Martindale  
Cleaning : With a damp cloth, do not use bleach



### ESD LEATHERETTE

Composition : PVC Compound/CO/RES  
Weight : 630 g/m<sup>2</sup>, ± 50 g/m<sup>2</sup> knitted fabric  
Colour fastness : Scale 6-8  
Cleaning : With a damp cloth, do not use bleach



INDUSTRY OFFICE MEDICAL DENTAL  
UPHOLSTERY